

Gold Plus Series 2x4 Panel Light 40w & 50w



DESCRIPTION:

Touch-Plate's 2x4 LED Panel Lights were designed to offer even and uniform light distribution, more lumens and higher cost savings. Our 2x4 Panel Lights can offer energy savings of 50% or greater over traditional T12 or T8 troffer lighting. Our LEDs are optimal for retrofit installations or new construction installations.

PRODUCT FEATURES:


- Aluminum/Alloy frame for heat dissipation
- Flicker Free
- Isolated driver
- Multiple mounting options
- Lifetime of 50,000 hrs or greater
- UL Listed (E489562)
- DLC Listed
 - 40w (ZY-P7-40W-XDS)
 - 50w (ZY-P7-50W-XDS)
- 5 Year Limited Warranty

SPECIFICATIONS:

- Wattage: 40w & 50w
- Lumens: 5,200lm & 6,500 (approx > 130lm/w)
- Equivalence: 3 or 4 Florescent Bulb Troffers
- CRI: >80Ra
- IP Rating: IP20
- LED Chips: Jufei 2835
- PF: >0.90

PHYSICAL PARAMETERS:

- Dimensions
 - Length: 47.44"
 - Width: 23.74"
 - Depth: 2.05"
- Weight
 - 14.99lbs

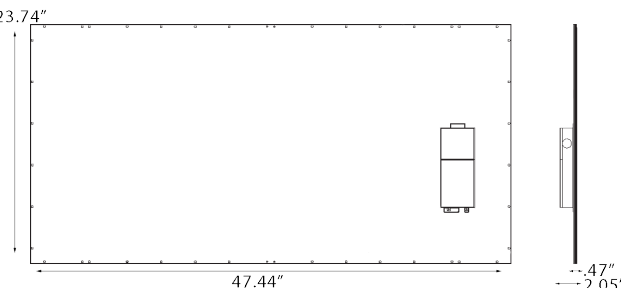



Gold Plus Series 2x4 Panel Light

ORDER GUIDE

LED Type XXX-	Lumens - Wattage XXX-XXX-	CCT XX	Voltage X
<ul style="list-style-type: none"> P24 Panel 2x4 	<ul style="list-style-type: none"> 052-040 5,200 lm - 4" i 065 - 050 6,500lm - 50w 	<ul style="list-style-type: none"> 30 3000k 40 4000k 50 5000k 	<ul style="list-style-type: none"> U 120-277v

ACCESSORIES (ORDERED SEPARATELY)

- Emergency Backup
- Occupancy Sensor
- Zigbee Relay
- Zigbee Dimmer
- Zigbee Controller

MOUNTING ACCESSORIES (ORDERED SEPARATELY)

- Surface Mount Kit
- Flush Mount Kit
- Stainless Steel Cable: 2ft/.5m, 3ft/1m, 7ft/2m, 10ft/3m, or 20ft/6m
- Lock Twist Plug: 3ft/1m or 10ft/3m
- No Plug Extension: 3ft/1m or 10ft/3m
- S Hook Clip: Medium & Large
- Stainless Steel Magnetic 'O' Hook

Gold Plus Series 2x4 Panel Light

INSTALLATION INFORMATION (WIRING)

This product must be installed in accordance with National Electrical Code(NEC) and/or applicable local codes, by a qualified electrician.


DANGER - RISK OF SHOCK - DISCONNECT POWER BEFORE INSTALLATION

- Make the wiring connections: Black/Brown (Line), White/Blue (Neutral), & Green/Yellow-Green (Ground).


INSTALLATION INFORMATION

This product must be installed in accordance with National Electrical Code(NEC) and/or applicable local codes, by a qualified electrician.


1. Unscrew the driver cover.

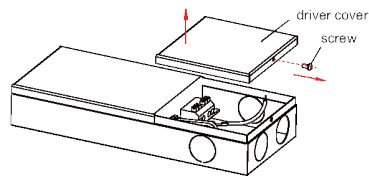


2. Connect the conduit to the driver box.

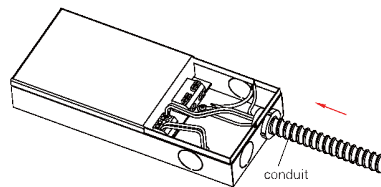



3. Make the necessary connections in the driver box.

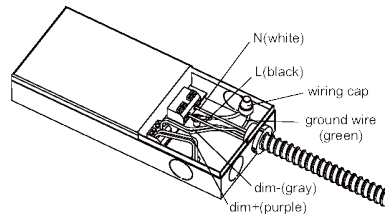



4. Replace the driver cover and affix with the screw.

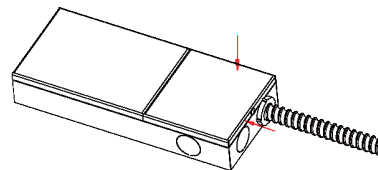

1. Replace the existing light fixture with the LED Light Panel.

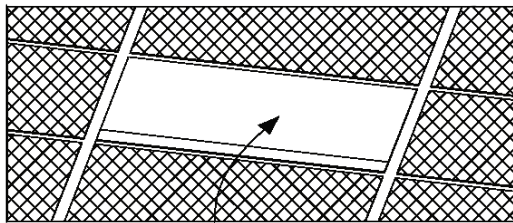

2. Use the protective brackets to safely mount the LED Panel.

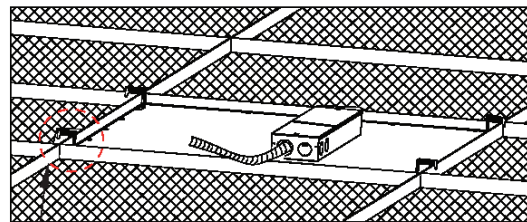

Steel Rope (to affix onto the roof)
Put the steel rope through the hole of the bracket and affix onto the brackets.