

2x4
Back Lite Panel
40w



DESCRIPTION:

Touch-Plate's 2x4 Back Lite Panels were designed to offer better security, more lumens, and higher cost savings. Our 2x4 Back Lite Panels can offer energy savings of 70% or greater over traditional metal halide or high pressure sodium lighting. Our LEDs are optimal for new construction and retrofit installations.

PRODUCT FEATURES:


- Isolated Side-Mounted External Driver
- Flicker Free
- Multiple Mounting Options
- Lifetime of 50,000 hrs or Greater
- ETL Listed
- DLC Listed (BLT-BLIT-2X4-40DR-P1-40-TYDZ-RS)
- 5 Year Limited Warranty

SPECIFICATIONS:

- Wattage: 40w
- Lumens: 5,200 (approx > 132m/w)
- Dimming: 0-10v
- Equivalence: (4) 48w T8 Tubes
- LED Chips: 3030
- PF: >0.90
- CRI: >80
- Beam Angle: 120°
- CCT: 4000K (Cool White)
- IP Rating: IP20
- Operating Temp: -4°F ~ 104°F

PHYSICAL PARAMETERS:

- Dimensions
 - Length: 47.74"
 - Width: 23.74"
 - Depth: 1.75"
- Weight: 9.25 lbs.

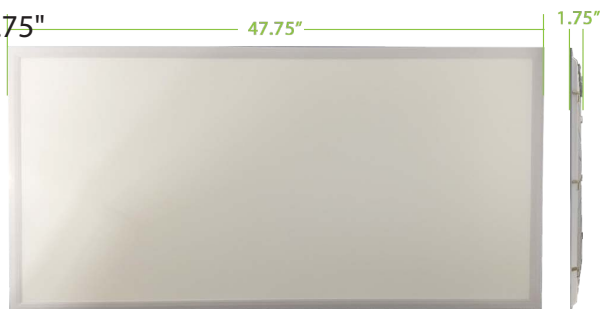



2x4 Back Lite Panel

ORDERING GUIDE

LED Type XXX -	Lumens - Wattage XXX - XXX -	CCT XX	Voltage X	
<ul style="list-style-type: none"> B24 2'x4' Back Lite Panel 	<ul style="list-style-type: none"> 052 - 040 5,200lm - 40w 	<ul style="list-style-type: none"> 40 4000k 	<ul style="list-style-type: none"> U 120-277v 	

ADDITIONAL ORDERING OPTIONS (specified at time of order)

Color

- White (Standard)

Lens Options

- Milky PC (Standard)


Beam Angle

- 120° (Standard)

ACCESSORIES (specified at time of order)

- Emergency Backup
- 0-10v- Dimming
- Occupancy Sensor
- Zigbee Relay
- Zigbee Dimmer
- Zigbee Controller
- Stainless Steel Cable: 2ft / 3ft / 7ft / 10ft / 20ft
- No Plug Extension: 3ft / 10ft
- S Hook Clip: Medium / Large
- Flush Mount Kit/Surface Mount Kit

PHOTOMETRIC

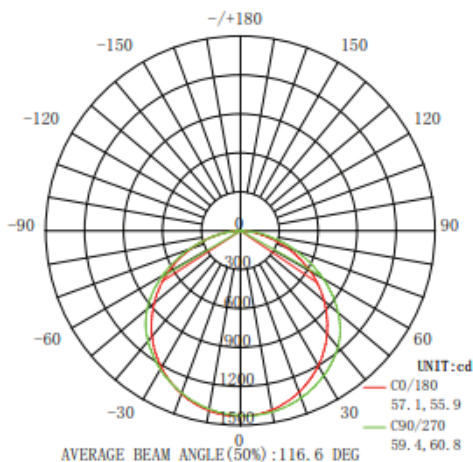

2x4 Back Lite Panel

INSTALLATION INFORMATION (WIRING)

This product must be installed in accordance with National Electrical Code(NEC) and/or applicable local codes, by a qualified electrician.

DANGER - RISK OF SHOCK - DISCONNECT POWER BEFORE INSTALLATION

- Connect wires of the Back Lite Panel by making the necessary 'HOT' (Black or Brown), 'Neutral' (White or Blue), and 'Ground' (Green) connections in an approved junction box.

INSTALLATION INFORMATION

Retrofit Procedure:

1. Turn OFF power to the fixture at the breaker panel before installation.
2. Open the diffuser from the light fixture.
3. Remove the fluorescent tubes and dispose of these properly as they may contain mercury.
4. Remove the ballast cover and disconnect host fixture ballast from main.
5. Remove the fixture (A).
6. Open Driver box and connect AC wires and dimming wire (B).
7. Lay Panel into the ceiling (C).
8. Switch ON power to the fixture at the breaker panel.

