



## Gold Series Corn Light Bulb 40/60/80w

### DESCRIPTION:

Touch-Plate's Corn Light Bulbs were designed to offer better security, more lumens, and higher cost savings. Our Corn Light Bulbs can offer energy savings of 70% or greater over traditional metal halide or high pressure sodium lighting. Our LEDs are optimal for new construction and retrofit installations.

### PRODUCT FEATURES:

- Instant start
- No flickering or humming
- Uniform light
- Built-in aluminum heatsink
- Lifetime of 50,000 hrs or greater
- UL Listed (E465717)
- DLC Listed:
  - SNC-CL-80wB2E39 (E39 Base Only)
- 5 Year Limited Warranty

### SPECIFICATIONS:

- Wattage: 40/60/80w
- Lumens: 5600/8400/11200 (approx > 140lm/w)
- Lighting Equivalence: 80/100/120w MHL/HPS/HID
- IP Rating: IP40
- LED Chips: Epistar 2835
- PF: >0.9
- Beam Angle 360°(Standard)

### PHYSICAL PARAMETERS:


- Dimensions
  - Width: 4.41"
  - Length: 10.04"(E39)
- Weight
  - 1.95 lbs

# Gold Series Corn Light Bulb

## ORDERING GUIDE

LED Type XXX -	Lumens - Wattage XXX - XXX-	CCT XX	Voltage X	BASE X
<ul style="list-style-type: none"> <li><b>CLB</b> Corn Light Bulb</li> </ul>	<ul style="list-style-type: none"> <li><b>056 - 040</b> 5600 - 40w</li> <li><b>084 - 060</b> 8400 - 60w</li> <li><b>112 - 80</b> 11,200 - 80w</li> </ul>	<ul style="list-style-type: none"> <li><b>30</b> 3000k</li> <li><b>40</b> 4000k</li> <li><b>50</b> 5000k</li> </ul>	<ul style="list-style-type: none"> <li><b>U</b> 100-277v</li> </ul>	<ul style="list-style-type: none"> <li><b>%</b> 7%+</li> </ul>

## PHOTOMETRIC

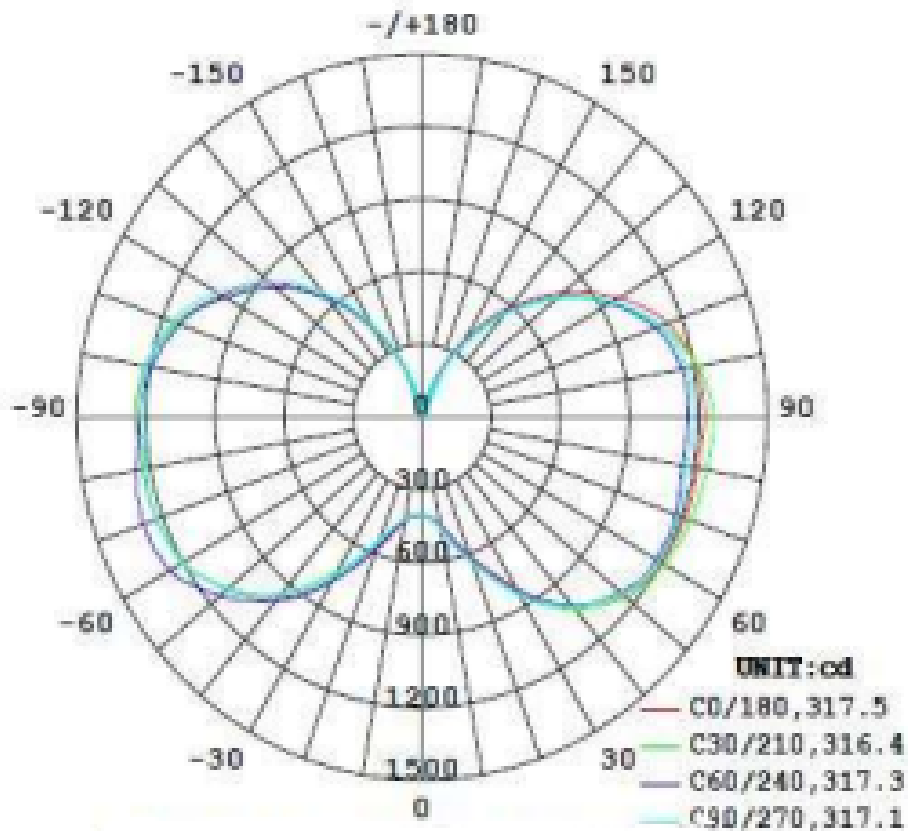

# Gold Series Corn Light Bulb

## INSTALLATION INFORMATION (WIRING)

This product must be installed in accordance with National Electrical Code(NEC) and/or applicable local codes, by a qualified electrician.

### **DANGER - RISK OF SHOCK - DISCONNECT POWER BEFORE INSTALLATION**

- Bypass the ballast by making the necessary 'HOT' (Black or Brown) , 'Neutral' ( White or Blue), and 'Ground' (Green) connections in an approved junction box.
- Turn the bulb into the light socket.
- Once tightened adjust the position of the bulb so the light is shining out of the housing.

## INSTALLATION INFORMATION

