touch-plate®
LED LIGHTING & CONTROLS

Platinum Series Wall Pack 120w

DESCRIPTION:

Touch-Plate's Wall Pack Lights were designed to offer better security, more lumens, and higher cost savings. Our Wall Pack Lights can offer energy savings of 70% or greater over traditional metal halide or high pressure sodium lighting. Our LEDs are optimal for new construction and retrofit installations.

PRODUCT FEATURES:

- Heavy-duty aluminum housing
- No flickering or humming
- Eco-friendly, no mercury
- Lifetime of 50,000 hrs or greater
- UL Listed (E505979
- DLC Listed
  - WP11-120N-D-50
- 5 Year Limited Warranty

SPECIFICATIONS:

- Wattage: 120w
- Lumens: 15,600 (approx > 130lm/w) •

Equivalence: 400w HID/HPS/MH •
IP Rating: IP65

- LED Chips: 3030
- PF: >0.95

PHYSICAL PARAMETERS:

- Dimensions
  - Length: 15.15”
  - Height: 9.74"
  - Depth: 7.6”
- Weight
  - 12.79 lbs

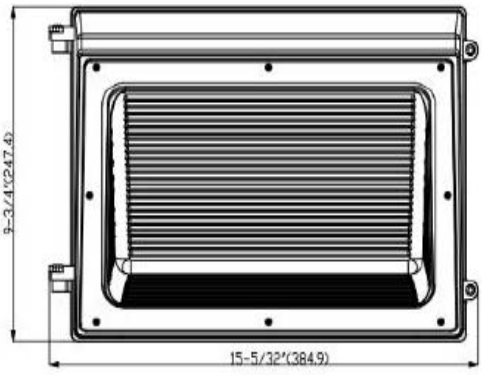

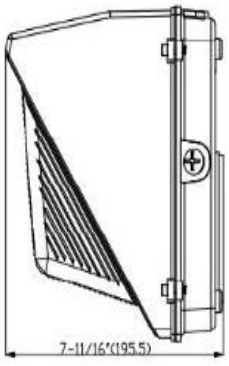

touch-plate
LED LIGHTING & CONTROLS

4822 Projects Drive Fort Wayne, IN 46825
P: 260.426.1565
E: ledsales@touchplate.com
www.ledlightingandcontrols.com

touch-plate®
LED LIGHTING & CONTROLS

Bronze Series Wall Pack

ORDERING GUIDE

LED Type **XXX -**	Lumens - Wattage **XXX - XXX**	CCT **-XX**	Voltage **X**	
• **WPX** Wall Pack	• **156-120** /5,600lm -120w	• **35** 3500k • **40** 4000k • **50** 5000k • **57** 5700k	• **U** 120-277v	

ACCESSORIES
(specified at time of order)

- Photocell Control

PHOTOMETRIC

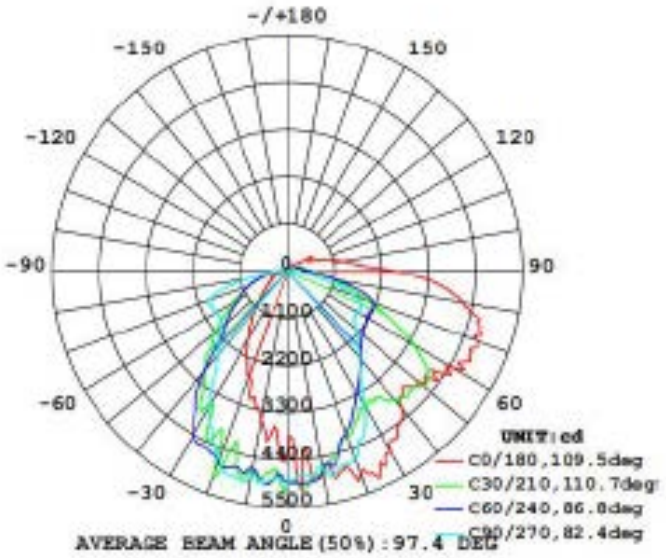

120W

touch-plate
LED LIGHTING & CONTROLS

4822 Projects Drive Fort Wayne, IN 46825
P: 260.426.1565
E: sales@touchplateled.com
www.touchplateled.com

touch-plate®
LED LIGHTING & CONTROLS

Bronze Series Wall Pack

INSTALLATION INFORMATION (WIRING)

This product must be installed in accordance with National Electrical Code(NEC) and/or applicable local codes, by a qualified electrician.

DANGER - RISK OF SHOCK - DISCONNECT POWER BEFORE INSTALLATION

- Make the necessary 'HOT' (Black or Brown) , 'Neutral' (White or Blue) , and 'Ground' (Green) connections in an approved junction box.

INSTALLATION INFORMATION

1



Rotate the 3 mountin brackets to the proper angle.

2

Hold the fixture to the wall making 3 marksaccording to the mounting brackets and drill holes for them.

3



Push anchors intothe holes. Match the mounting brackets to the anchors and attach the fiture to the wall with the screws provided.

4

Connect the wires making sure there is good wire protection.

1

Take apart the PC cover and fixture housing

2



Hold the fixture firmly against the wall and drill 3 holes for the mounting brackets

3



Push anchors into the holes. Line up the fiexture to the wall with the holes and attach the fixture to the wall with the screws proved

4



Put the PC cover and fixture housing back together.

touch-plate
LED LIGHTING & CONTROLS

4822 Projects Drive Fort Wayne, IN 46825
P: 260.426.1565
E: ledsales@touchplate.com
www.ledlightingandcontrols.com