

## Silver Series Canopy Light 45w



### DESCRIPTION:

Touch-Plate's Canopy Parking Garage Lights were designed to offer better security, more lumens, and higher cost savings. Our Canopy Parking Garage Lights can offer energy savings of 70% or greater over traditional metal halide or high pressure sodium lighting. Our LEDs are optimal for new construction and retrofit installations.

### PRODUCT FEATURES:



- Instant Start: no flickering or humming
- UV and IR free
- Die cast aluminum housing
- Lifetime of 50,000 hrs or greater
- UL Listed (E468128)
- DLC Listed
  - SNC- CP-45W-2111-1601
- 5 Year Limited Warranty

### SPECIFICATIONS:

- Wattage: 45w
- Lumens: 4,800 (approx > 110lm/w)
- Equivalence: 70W CFL / 150W MHL/HPS/HID
- IP Rating: IP65
- LED Chips: Philips Lumileds 3030 2D
- PF: >0.90
- Lens: Clear Glass
- Beam Angle: 120°
- Color : White

### PHYSICAL PARAMETERS:

- Dimensions
  - Width: 10.63"
  - Depth: 3.54"
  - Length: 10.63"
- Weight
  - 7.48 lbs

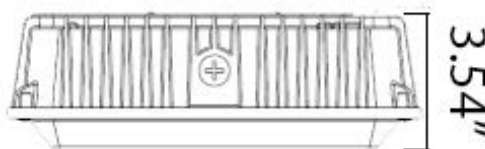




# Silver Series Canopy Light

## ORDERING GUIDE

LED Type XXX -	Lumens - Wattage XXJ - JJJ	CCT -XX	Voltage X	
<ul style="list-style-type: none"> <li><b>CPG</b> Canopy Parking Garage</li> </ul>	<ul style="list-style-type: none"> <li><b>048 - 045</b> 4,800lm - 45w</li> </ul>	<ul style="list-style-type: none"> <li><b>40</b> 4000k</li> <li><b>50</b> 5000k</li> <li><b>57</b> 5700k</li> </ul>	<ul style="list-style-type: none"> <li><b>U</b> 100-277v</li> </ul>	

## PHOTOMETRIC

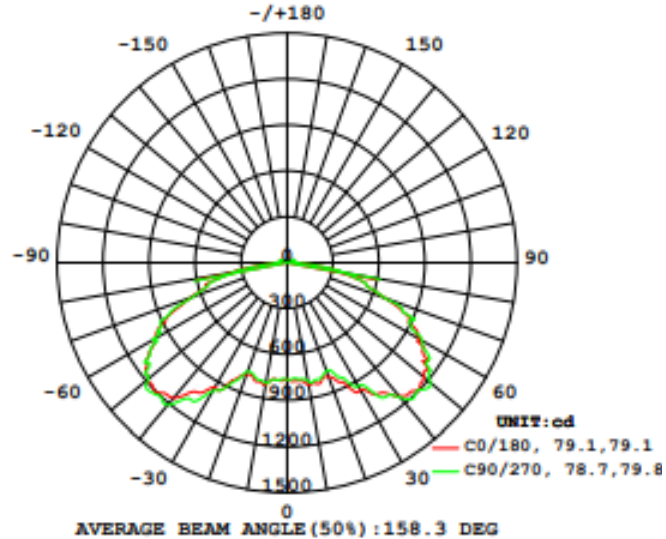

# Silver Series Canopy Light

## INSTALLATION INFORMATION (WIRING)


This product must be installed in accordance with National Electrical Code(NEC) and/or applicable local codes, by a qualified electrician.

### **DANGER - RISK OF SHOCK - DISCONNECT POWER BEFORE INSTALLATION**


- Make the necessary 'HOT' (Black or Brown) , 'Neutral' (White or Blue) , and 'Ground' (Green) connections in an approved junction box.

## INSTALLATION INFORMATION


1. Remove the plate from the LED fixture.

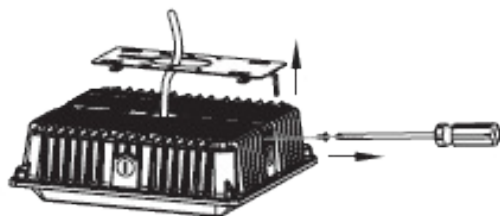


2. Drill holes in the ceiling based on the plate.

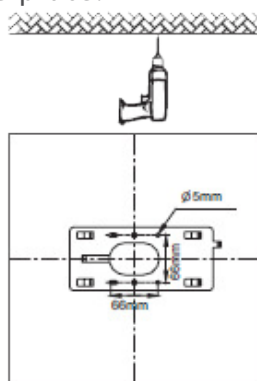

3. Place the plastic wall anchors in the holes. Affix the plate to the ceiling with screws and/or washers.

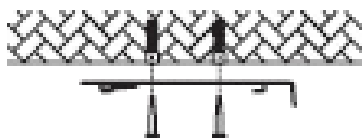

4. Hang the fixture by the plate, then make the wire connections: Black/ Brown (Line), White/Blue (Neutral), & Green/Yellow- Green (Ground).

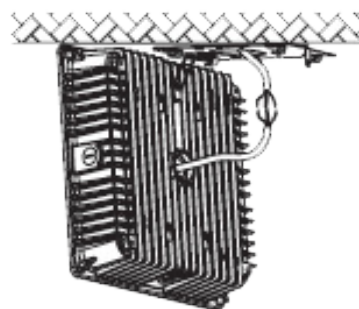

5. Install the fixture by fastening the screws on both sides of the fixture.

