



Bronze Series 1x4 Panel Light 40w

DESCRIPTION:

Touch-Plate's 1x4 Panels Lights were designed to offer better security, more lumens, and higher cost savings. Our 1x4 Panel Lights can offer energy savings of 70% or greater over traditional metal halide or high pressure sodium lighting. Our LEDs are optimal for new construction and retrofit installations.

PRODUCT FEATURES:


- Aluminum/Alloy frame for heat dissipation
- Flicker Free
- Isolated Driver
- Multiple Mounting Options
- Lifetime of 50,000 hrs or greater
- UL (E492428)
- DLC Listed
 - CPS-U3A40-P6
- 5 Year Limited Warranty

SPECIFICATIONS:

- Wattage: 40w
- Lumens: 4,400 (approx > 100lm/w)
- Equivalence: 2: 32w T8 Bulbs
- IP Rating: IP20
- LED Chips: Jufei
- PF: >0.90

PHYSICAL PARAMETERS:

- Dimensions
 - Length: 47.70"
 - Depth: 1.80"
 - Width: 11.90"
- Weight
 - 16.4 lbs

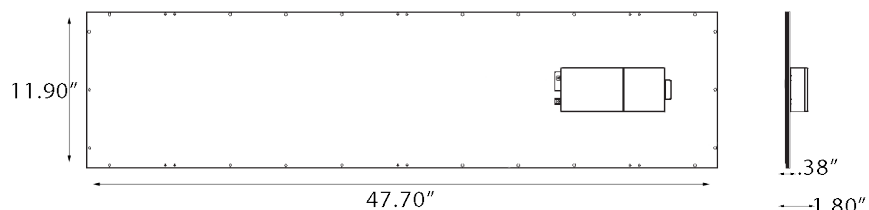



1x4 Panel Light

ORDERING GUIDE


LED Type XXX -	Lumens - Wattage XXX - XXX -	CCT XX	Voltage X
<ul style="list-style-type: none"> P14 1'x 4' Panel Light 	<ul style="list-style-type: none"> 044-040 4,400lm -40w 	<ul style="list-style-type: none"> 40 4000k 	<ul style="list-style-type: none"> U 100-277v

ACCESSORIES

(specified at time of order)

- Emergency Backup
- Occupancy Sensor
- Zigbee Relay
- Zigbee Dimmer
- Zigbee Controller
- Surface Mount Kit
- Flush Mount Kit
- S Hook Clip: Medium & Large
- Stainless Steel Cable: 2ft/.5m, 3ft/1m, 7ft/2m, 10ft/3m, or 20ft/6m
- Lock Twist Plug: 3ft/1m or 10ft/3m
- No Plug Extension: 3ft/1m or 10ft/3m
- S Hook Clip: Medium & Large
- Stainless Steel Magnetic 'O' Hook

PHOTOMETRIC

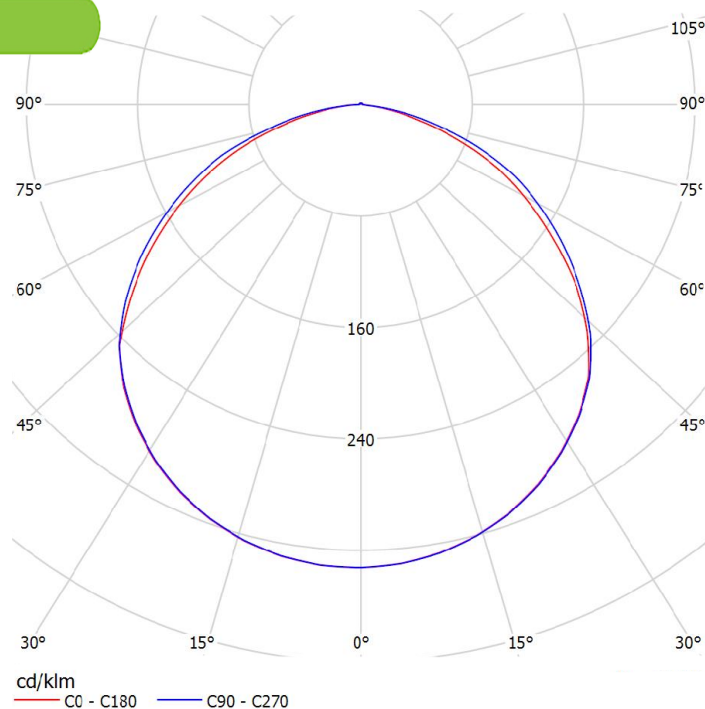

1x4 Panel Light

INSTALLATION INFORMATION (WIRING)


This product must be installed in accordance with National Electrical Code(NEC) and/or applicable local codes, by a qualified electrician.

DANGER - RISK OF SHOCK - DISCONNECT POWER BEFORE INSTALLATION


- Plug in the 1x4 Panel Light or make the necessary 'HOT' (Black or Brown), 'Neutral' (White or Blue), and 'Ground' (Green) connections in an approved junction box.

INSTALLATION INFORMATION


1. Unscrew the driver cover.

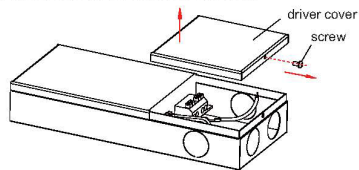


2. Connect the conduit to the driver box.

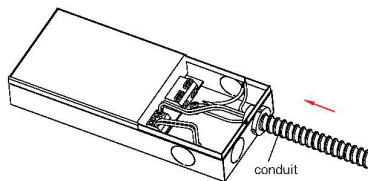



3. Make the necessary connections in the driver box.

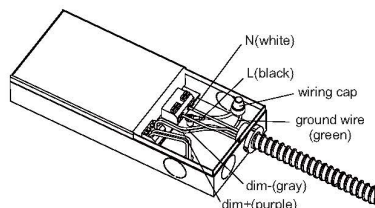

4. Replace the driver cover and affix with the screw.

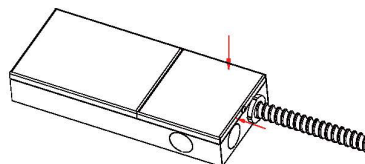

1. Replace the existing light fixture with the LED Light Panel.

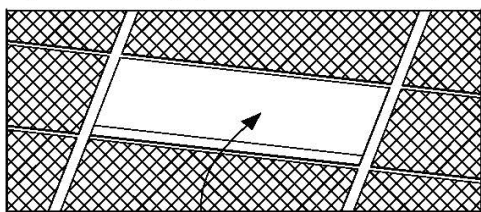

2. Use the protective brackets to safely mount the LED Panel.

