"Ill touch-plate"

Gold Series Canopy Light 80w



DESCRIPTION:

Touch-Plate's Canopy Lights were designed to offer better security, more lumens, and higher cost savings. Our Canopy Lights can offer energy savings of 70% or greater over traditional metal halide or high pressure sodium lighting. Our LEDs are optimal for new construction and retrofit installations.

PRODUCT FEATURES:

- Instant Start: No flickering or humming
- UV free
- Die cast aluminum housing
- Lifetime of 50,000 hrs or greater
- UL Listed (E470400)
- 5 Year Limited Warranty


SPECIFICATIONS:

- · Wattage: 80w
- Lumens: 9,600 (approx > 90lm/w)
- Equivalence: 160w MHL/HPS/HID
- IP Rating: IP44
- LED Chips: Philips Lumileds 3030 2D
- PF: >0.90
- · Lens: Milky Glass
- Beam Angle: 120°
- Color: White

PHYSICAL PARAMETERS:

- Dimensions
 - o Width: 11"
 - o Depth: 4.2"
 - o Length: 11"
- Weight
 - o 4.3 lbs







4822 Projects Drive Fort Wayne, IN 46825
P: 260.426.1565

E: sales@touchplateled.com www.touchplateled.com






Gold Series Canopy Light

ORDERING GUIDE

LED Type	Lumens - Wattage	CCT	Voltage	
XXX -	XXJ - JJJ	- XX	X	
• CPG Canopy Parking Garage	• 096 - 080 9,600lm - 80w	• 40 4000k • 50 5000k • 57 5700k	• U 100-277v	

PHOTOMETRIC

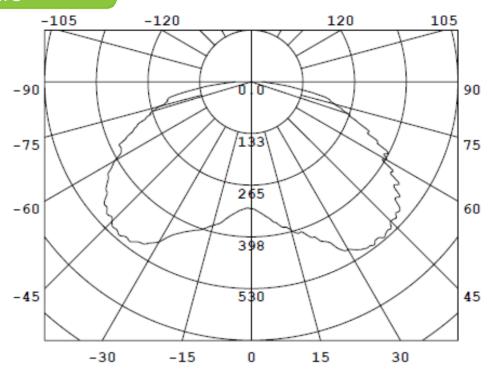



Gold Series Canopy Light

INSTALLATION INFORMATION (WIRING)


This product must be installed in accordance with National Electrical Code(NEC) and/or applicable local codes, by a qualified electrician.

DANGER - RISK OF SHOCK - DISCONNECT POWER BEFORE INSTALLATION


• Make the necessary 'HOT' (Black or Brown), 'Neutral' (White or Blue), and 'Ground' (Green) connections in an approved junction box.

INSTALLATION INFORMATION


1. Remove the plate from the LED fixture.



2. Drill holes in the ceiling based on the plate.



3. Place the plastic wall anchors in the holes. Affix the plate to the ceiling with screws and/or washers.



4. Hang the fixture by the plate, then make the wire connections: Black/Brown (Line), White/Blue (Neutral), & Green/Yellow- Green (Ground).



5. Install the fixture by fastening the screws on both sides of the fixture.

